



Top View

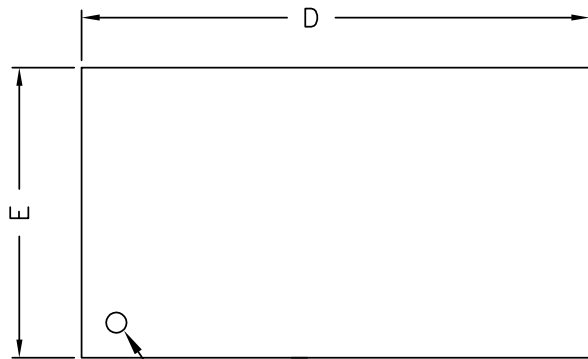


Pin 1 identification

Bottom View

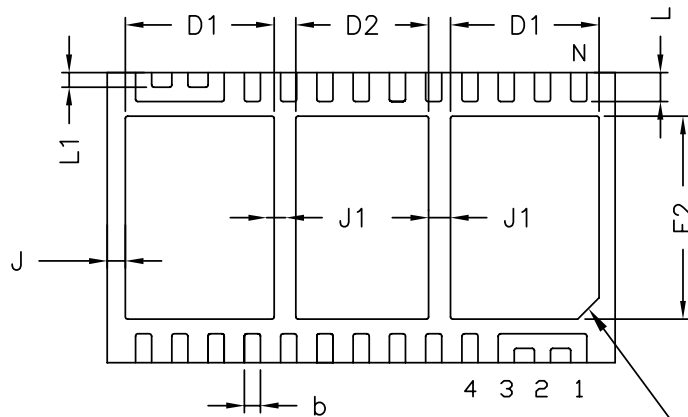

Pin 1 chamfer  
0.3mmx45°

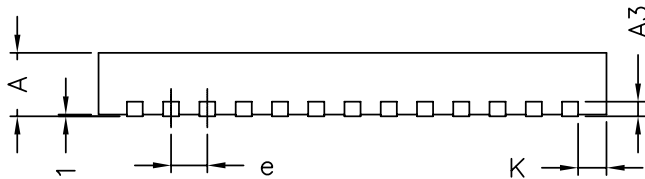


Side View


REVISION HISTORY			
REV	DISCRIPTION	DATE	APP'D
A	DRAWING ORIGINATION	11/6/13	AD

26LD 7 X 4 MM DFN -- (OPTION 1)*						
SYMBOLS	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.039
A1	0.00	—	0.05	0.000	—	0.002
A3	0.18	0.20	0.23	0.007	0.008	0.009
b	0.17	0.22	0.27	0.007	0.009	0.011
D	6.95	7.00	7.05	0.274	0.276	0.278
D1	2.00	2.05	2.10	0.079	0.081	0.083
D2	1.78	1.83	1.88	0.070	0.072	0.074
e	0.50 BSC			0.020 BSC		
E	3.95	4.00	4.05	0.156	0.157	0.159
E2	2.73	2.78	2.83	0.108	0.109	0.111
J	0.20	0.25	0.30	0.008	0.010	0.012
J1	0.25	0.30	0.35	0.010	0.012	0.014
K	0.34	0.39	0.44	0.013	0.015	0.017
L	0.35	0.40	0.45	0.014	0.016	0.018
L1	0.20 BSC			0.008 BSC		
N	26			26		

\* Refer to product datasheet for POD option being used


 A New Direction in Mixed-Signal	<b>EXAR CORPORATION</b>		
	26LD DFN PACKAGE OUTLINE (OPT1)		
Packaging Approval:	Drawing No:	POD-0000012	
By: AD	Date: 11/6/13	Revision: A	Sheet: 1 OF 3

Top View

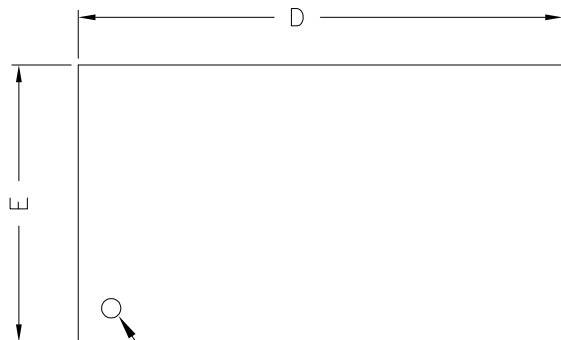


Pin 1 identification

Bottom View

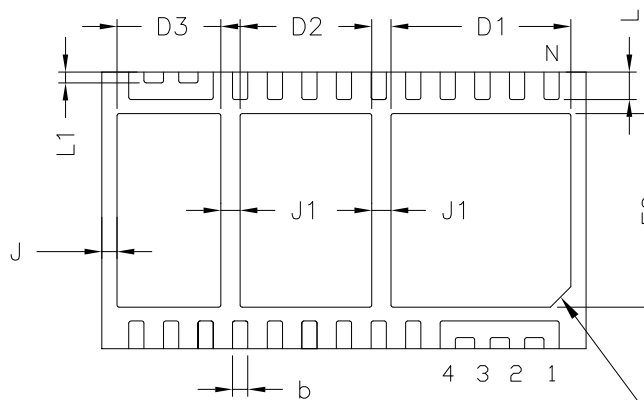

Pin 1 chamfer  
0.3mmx45°

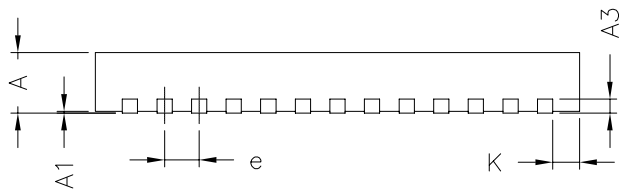

Side View

REVISION HISTORY

REV	DISCRIPTION	DATE	APP'D
A	DRAWING ORIGINATION	11/6/13	AD

26LD 7 X 4 MM DFN -- (OPTION 2)\*

SYMBOLS	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.039
A1	0.00	—	0.05	0.000	—	0.002
A3	0.18	0.20	0.23	0.007	0.008	0.009
b	0.17	0.22	0.27	0.007	0.009	0.011
D	6.95	7.00	7.05	0.274	0.276	0.278
D1	2.55	2.60	2.65	0.100	0.102	0.104
D2	1.85	1.90	1.95	0.073	0.075	0.077
D3	1.45	1.50	1.55	0.057	0.059	0.061
e	0.50 BSC			0.020 BSC		
E	3.95	4.00	4.05	0.156	0.157	0.159
E2	2.75	2.80	2.85	0.108	0.110	0.112
J	0.17	0.22	0.25	0.007	0.009	0.010
J1	0.23	0.28	0.33	0.009	0.011	0.013
K	0.34	0.39	0.44	0.013	0.015	0.017
L	0.35	0.40	0.45	0.014	0.016	0.018
L1	0.16 BSC			0.006 BSC		
N	26			26		

\* Refer to product datasheet for POD option being used



EXAR CORPORATION

26LD DFN PACKAGE OUTLINE (OPT2)

Packaging Approval:

Drawing No: POD-0000012


By: AD

Date: 11/6/13

Revision: A


Sheet: 2 OF 3

Top View

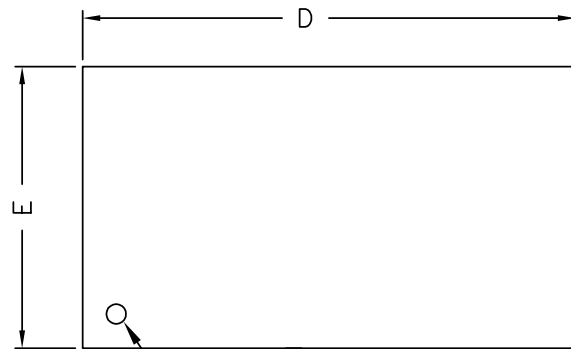


Pin 1 identification

Bottom View

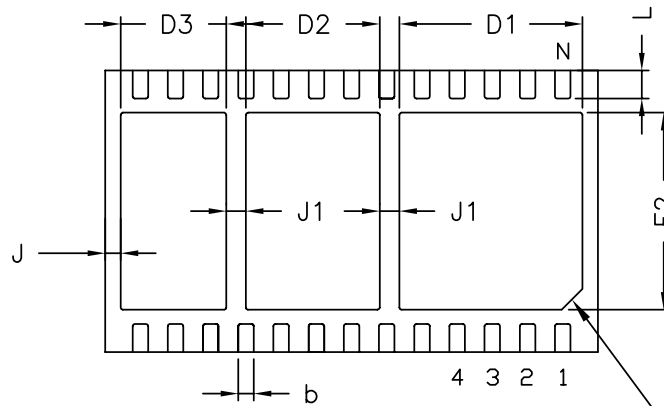

Pin 1 chamfer  
0.3mmx45°

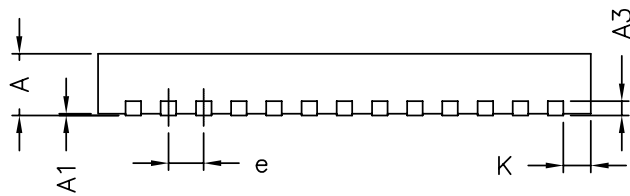


Side View

REVISION HISTORY			
REV	DISCRIPTION	DATE	APP'D
A	DRAWING ORIGINATION	11/6/13	AD

26LD 7 X 4 MM DFN -- (OPTION 3)*						
SYMBOLS	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.039
A1	0.00	—	0.05	0.000	—	0.002
A3	0.18	0.20	0.23	0.007	0.008	0.009
b	0.17	0.22	0.27	0.007	0.009	0.011
D	6.95	7.00	7.05	0.274	0.276	0.278
D1	2.55	2.60	2.65	0.100	0.102	0.104
D2	1.85	1.90	1.95	0.073	0.075	0.077
D3	1.45	1.50	1.55	0.057	0.059	0.061
e	0.50 BSC			0.020 BSC		
E	3.95	4.00	4.05	0.156	0.157	0.159
E2	2.75	2.80	2.85	0.108	0.110	0.112
J	0.17	0.22	0.25	0.007	0.009	0.010
J1	0.23	0.28	0.33	0.009	0.011	0.013
K	0.34	0.39	0.44	0.013	0.015	0.017
L	0.35	0.40	0.45	0.014	0.016	0.018
N	26			26		

\* Refer to product datasheet for POD option being used

 A New Direction in Mixed-Signal	<b>EXAR CORPORATION</b>		
	26LD DFN PACKAGE OUTLINE (OPT3)		
Packaging Approval:	Drawing No:	POD-0000012	
By: AD	Date: 11/6/13	Revision: A	Sheet: 3 OF 3